


COPY#8

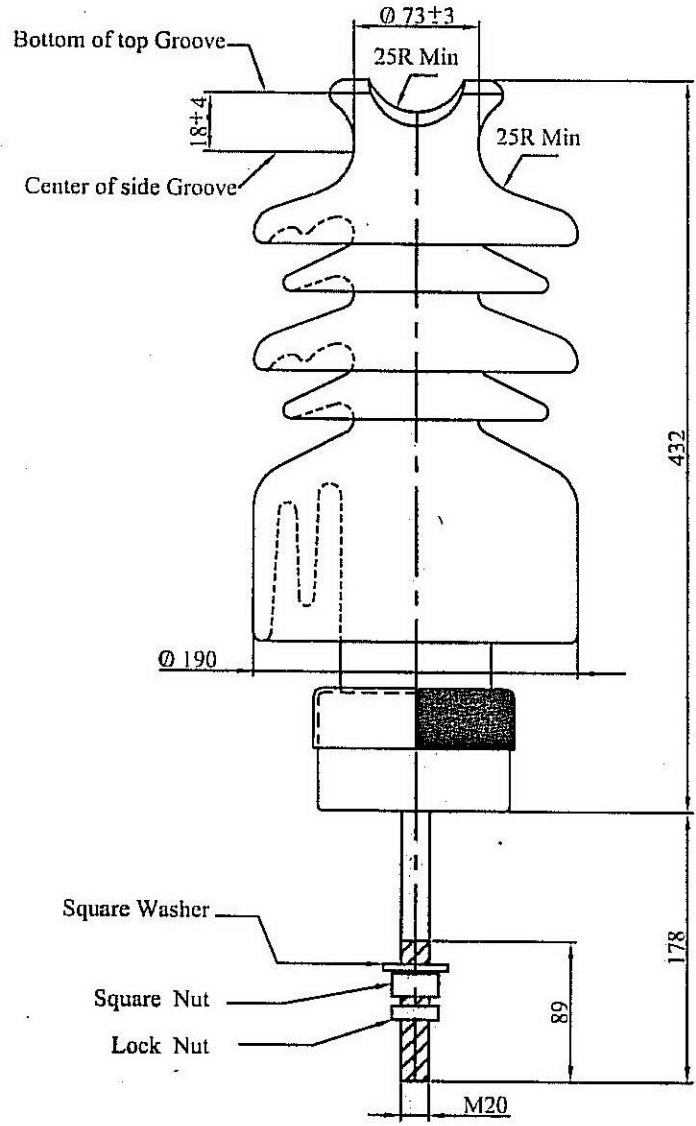

Leakage distance , mm	953
Protected Leakage distance (mm)	483
Cantilever strength , kN	12.5
Cantilever proof load , kN	5
Low - frequency dry flashover , kilovolts	140
Low - frequency wet flashover , kilovolts	95
Critical - impulse flashover , positive , kilovolts	225
Critical - impulse flashover , negative , kilovolts	300
Low - frequency test voltage , rms to ground , kilovolts	44
Maximum RIV at 1,000 kHz , microvolts	200
Puncture proof	Yes
Colour of insulator glazed	- Brown

INSULATOR , PIN - POST TYPE ACCORDING TO TIS. 1251 , TYPE 56 / 57 - 4

CATALOGUE NO. PP - 574

UNIT: mm.

SCALE : NTS.

REV:

DRAWN: *[Signature]*

CHECKED: *[Signature]*

APPROVED: *[Signature]*

FINE ART CERAMIC CO.,LTD

DATE: 25/9/2007

DRAWING NO. FAC - 015