



## PRECISE HIGH VOLTAGE FUSE LINKS

### FUSE LINKS TYPE K

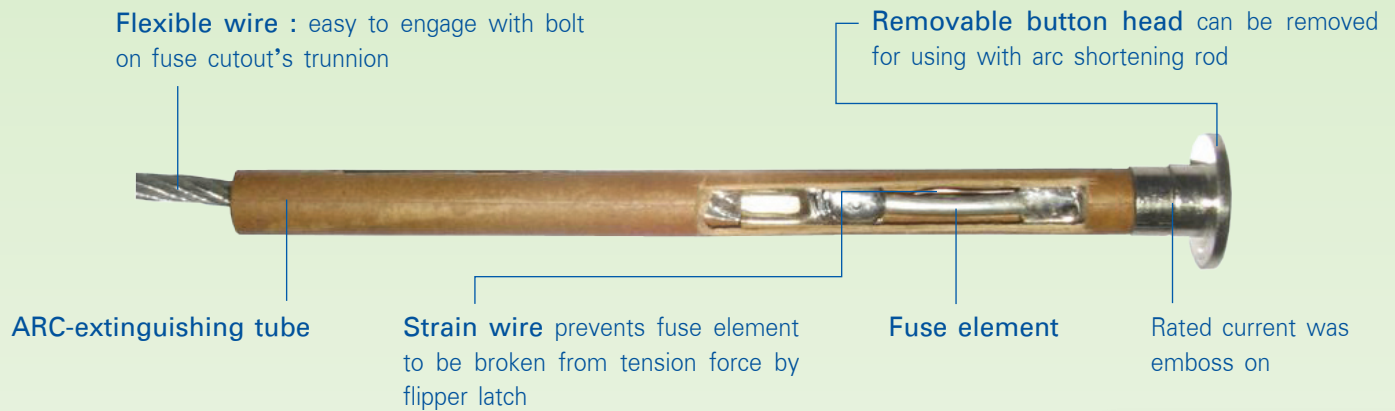

### High Voltage Fuse Links

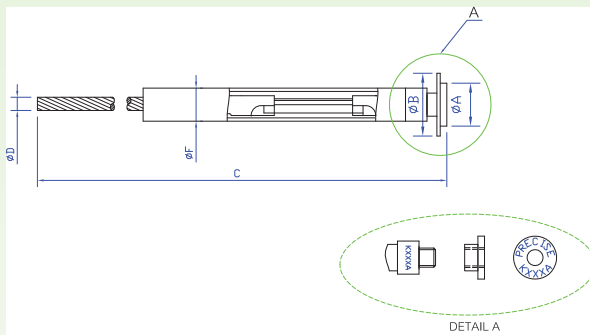

### Test report



### Performance Characteristics

Ampere	Catalog number		C (mm) Min.		Ø A (mm) ±0.5 mm	Ø B (mm) ±0.5 mm	Ø D (mm) ±0.5 mm	Ø F (mm) ±1.5 mm
	27kV	38kV	27kV	38kV				
1	K00127	K00138	661	760	12.7	19.0	2.0	8.0
2	K00227	K00238	661	760	12.7	19.0	2.0	8.0
3	K00327	K00338	661	760	12.7	19.0	2.0	8.0
6	K00627	K00638	661	760	12.7	19.0	2.0	8.0
8	K00827	K00838	661	760	12.7	19.0	2.0	8.0
10	K01027	K01038	661	760	12.7	19.0	2.0	8.0
12	K01227	K01238	661	760	12.7	19.0	2.0	8.0
15	K01527	K01538	661	760	12.7	19.0	2.0	8.0
20	K02027	K02038	661	760	12.7	19.0	2.5	8.0
25	K02527	K02538	661	760	12.7	19.0	2.5	8.0
30	K03027	K03038	661	760	12.7	19.0	3.0	8.0
40	K04027	K04038	661	760	12.7	19.0	3.0	8.0
50	K05027	K05038	661	760	12.7	19.0	4.0	10.0
65	K06527	K06538	661	760	19.0	NO	4.0	10.0
80	K08027	K08038	661	760	19.0	NO	5.0	10.0
100	K10027	K10038	661	760	19.0	NO	5.0	10.0

Note: 1) Button head thread size 1/4 " pitch G28 length 7 mm +/- 1 mm  
 2) For rated current 1, 2 and 3A have only one fuse element instead of strain wire position  
 3) Washer will be supply only with current rated 1 to 50 Amperes

### Feature

- Design and manufacture accordance to ANSI C37.42
- Removable button head style for using with arc shortening rod
- Use to drop out distribution fuse cutout maximum design voltage 27kV and 38kV




### PRECISE INTERNATIONAL CORPORATION LTD.

Sale Office: 1842 Krungthep-Nonthaburi Rd., Bangsue, Bangkok, 10800 Thailand  
 Telephone: (662) 910 9700-12    Telefax: (662) 910 9713-4  
 Website: www.precise.co.th    E-mail: info@precise.co.th

## PRECISE HIGH VOLTAGE FUSE LINKS

### PRECISE fuse links Time-Current Characteristics Curve

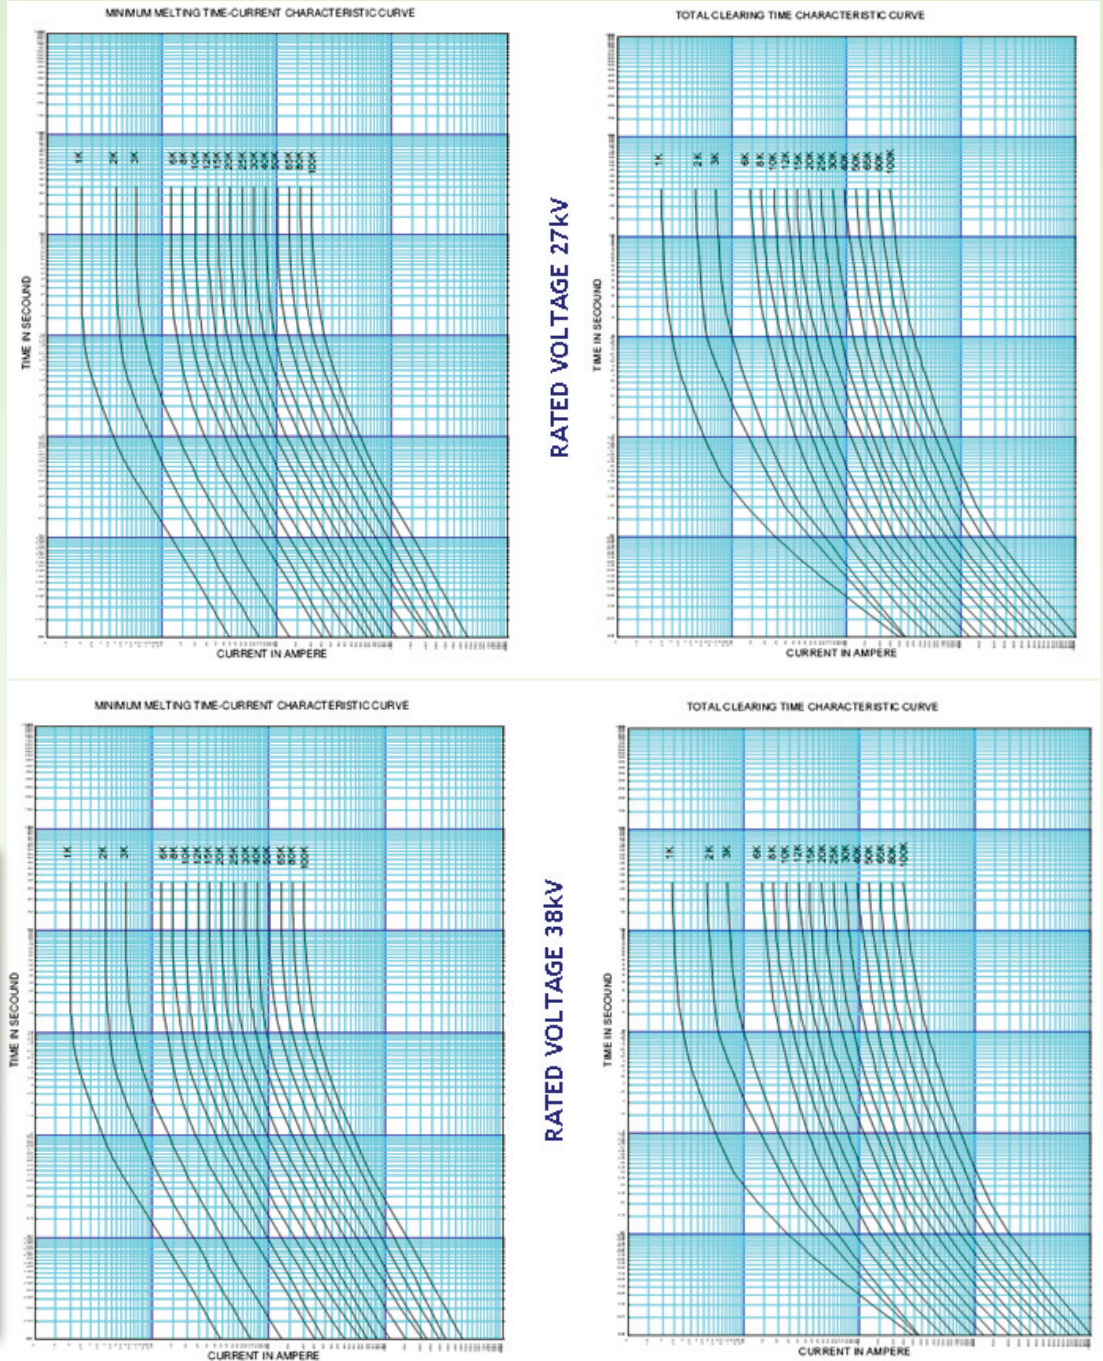

Authorized Dealer: